


Schedule												
Symbol	Label	Image	QTY	Manufacturer	Catalog Number	Description	Filename	Lumens per Lamp	LLF	Wattage	Distribution	Notes
	A		10	American Electric Lighting	ATBMIC 10BLEDE70 MVOLT R3 4K	ATBMIC, type 3 distribution, 4000K LED, mounted at 16' AFG	ATBMIC_10BLEDE70_XXXXX_R3_4K_SK.ies	2924	0.97	24	TYPE III, MEDIUM, BUG RATING: B1 - U0 - G1	
	B		34	Holophane	HLWPC2 P10 40K MVOLT TFTM	Wallpack Full Cutoff, Forward Throw distribution, 4000K LED, mounted at 12' AFG.	HLWPC2_P10_40K_XX_TFTM.ies	3209	0.95	28	TYPE IV, SHORT, BUG RATING: B1 - U0 - G1	

Statistics						
Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min
Paved/Parking Areas	+	2.7 fc	4.0 fc	0.7 fc	5.7:1	3.9:1

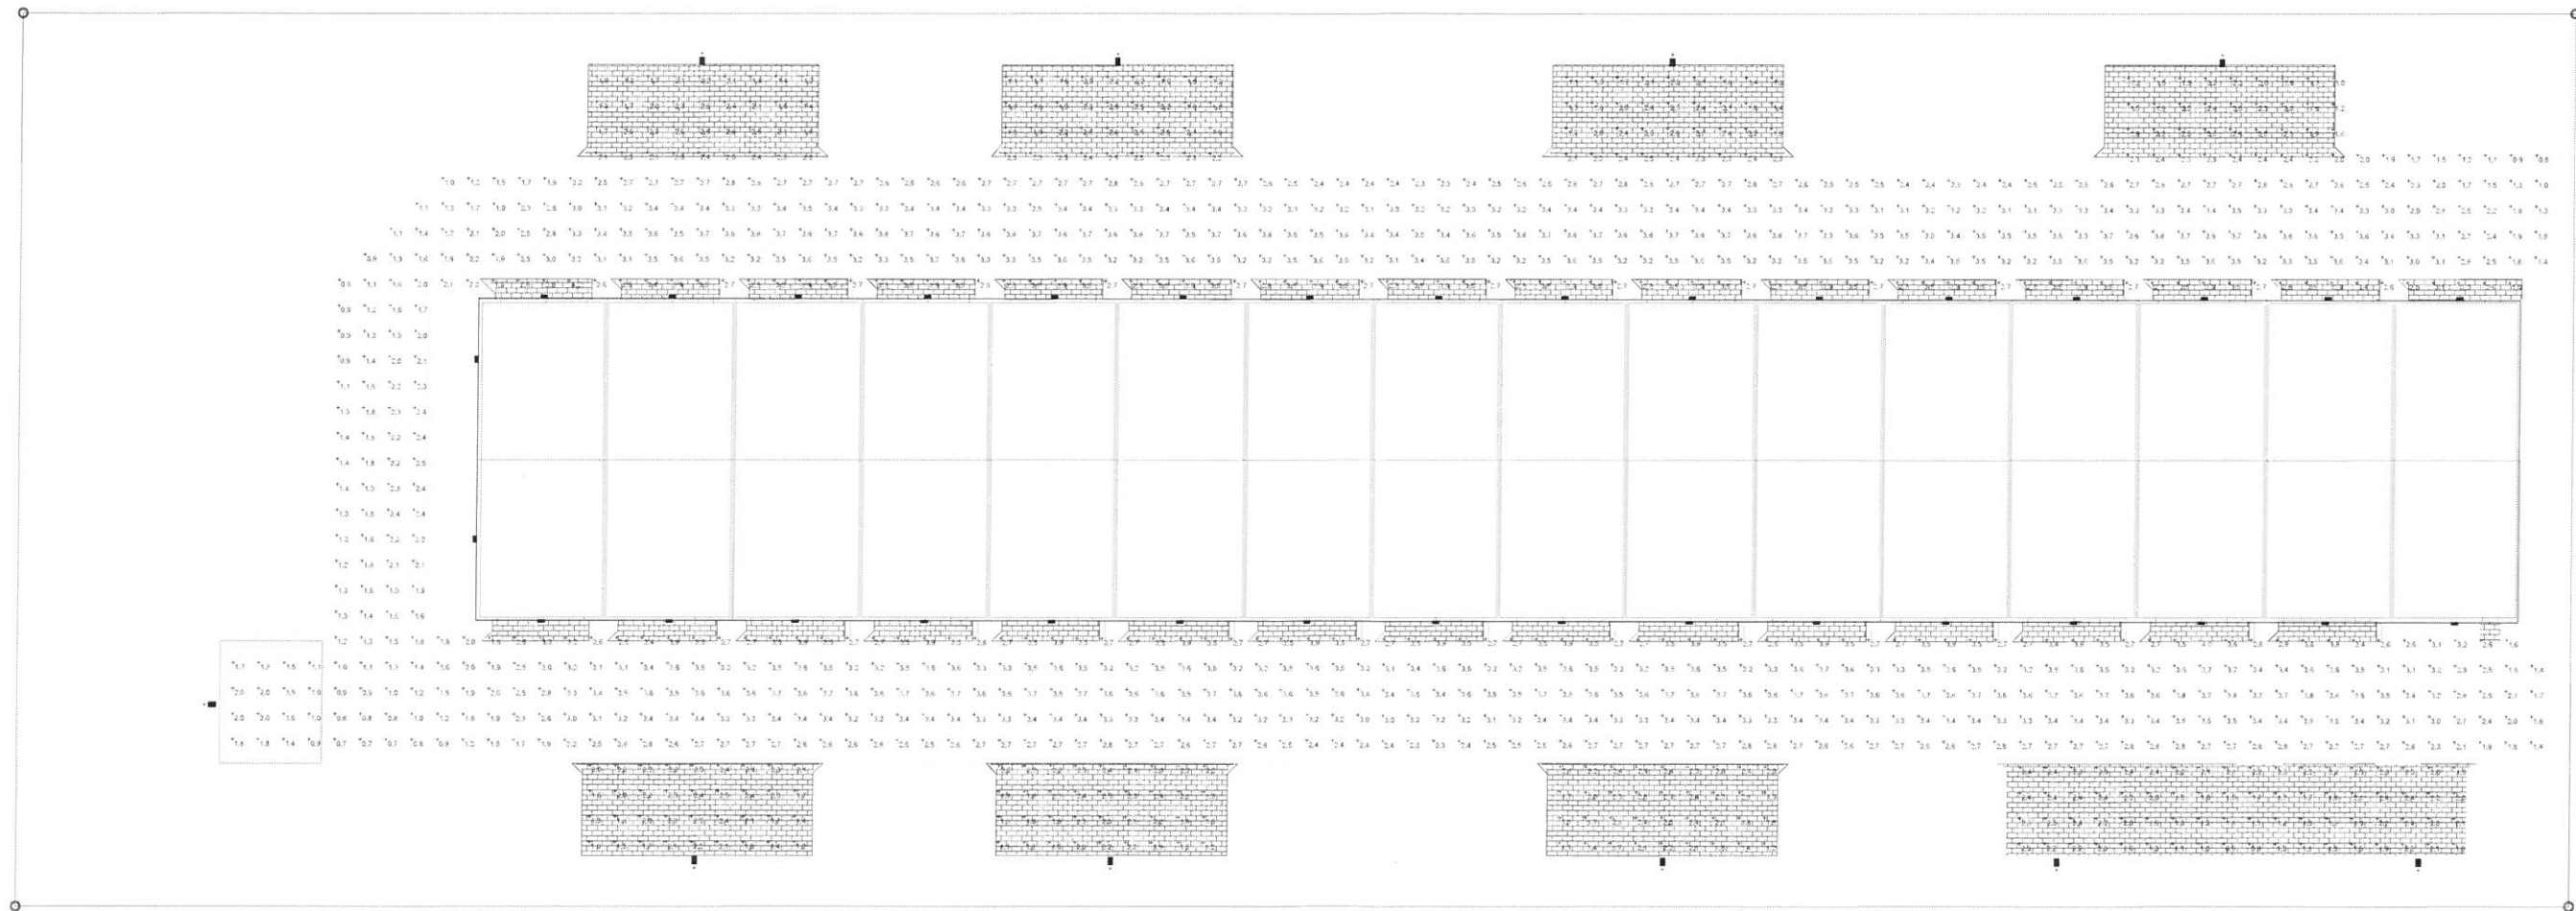

Plan View
Scale: 1" = 16'